


Tylose®

for Personal Care



Tylose® for Personal Care

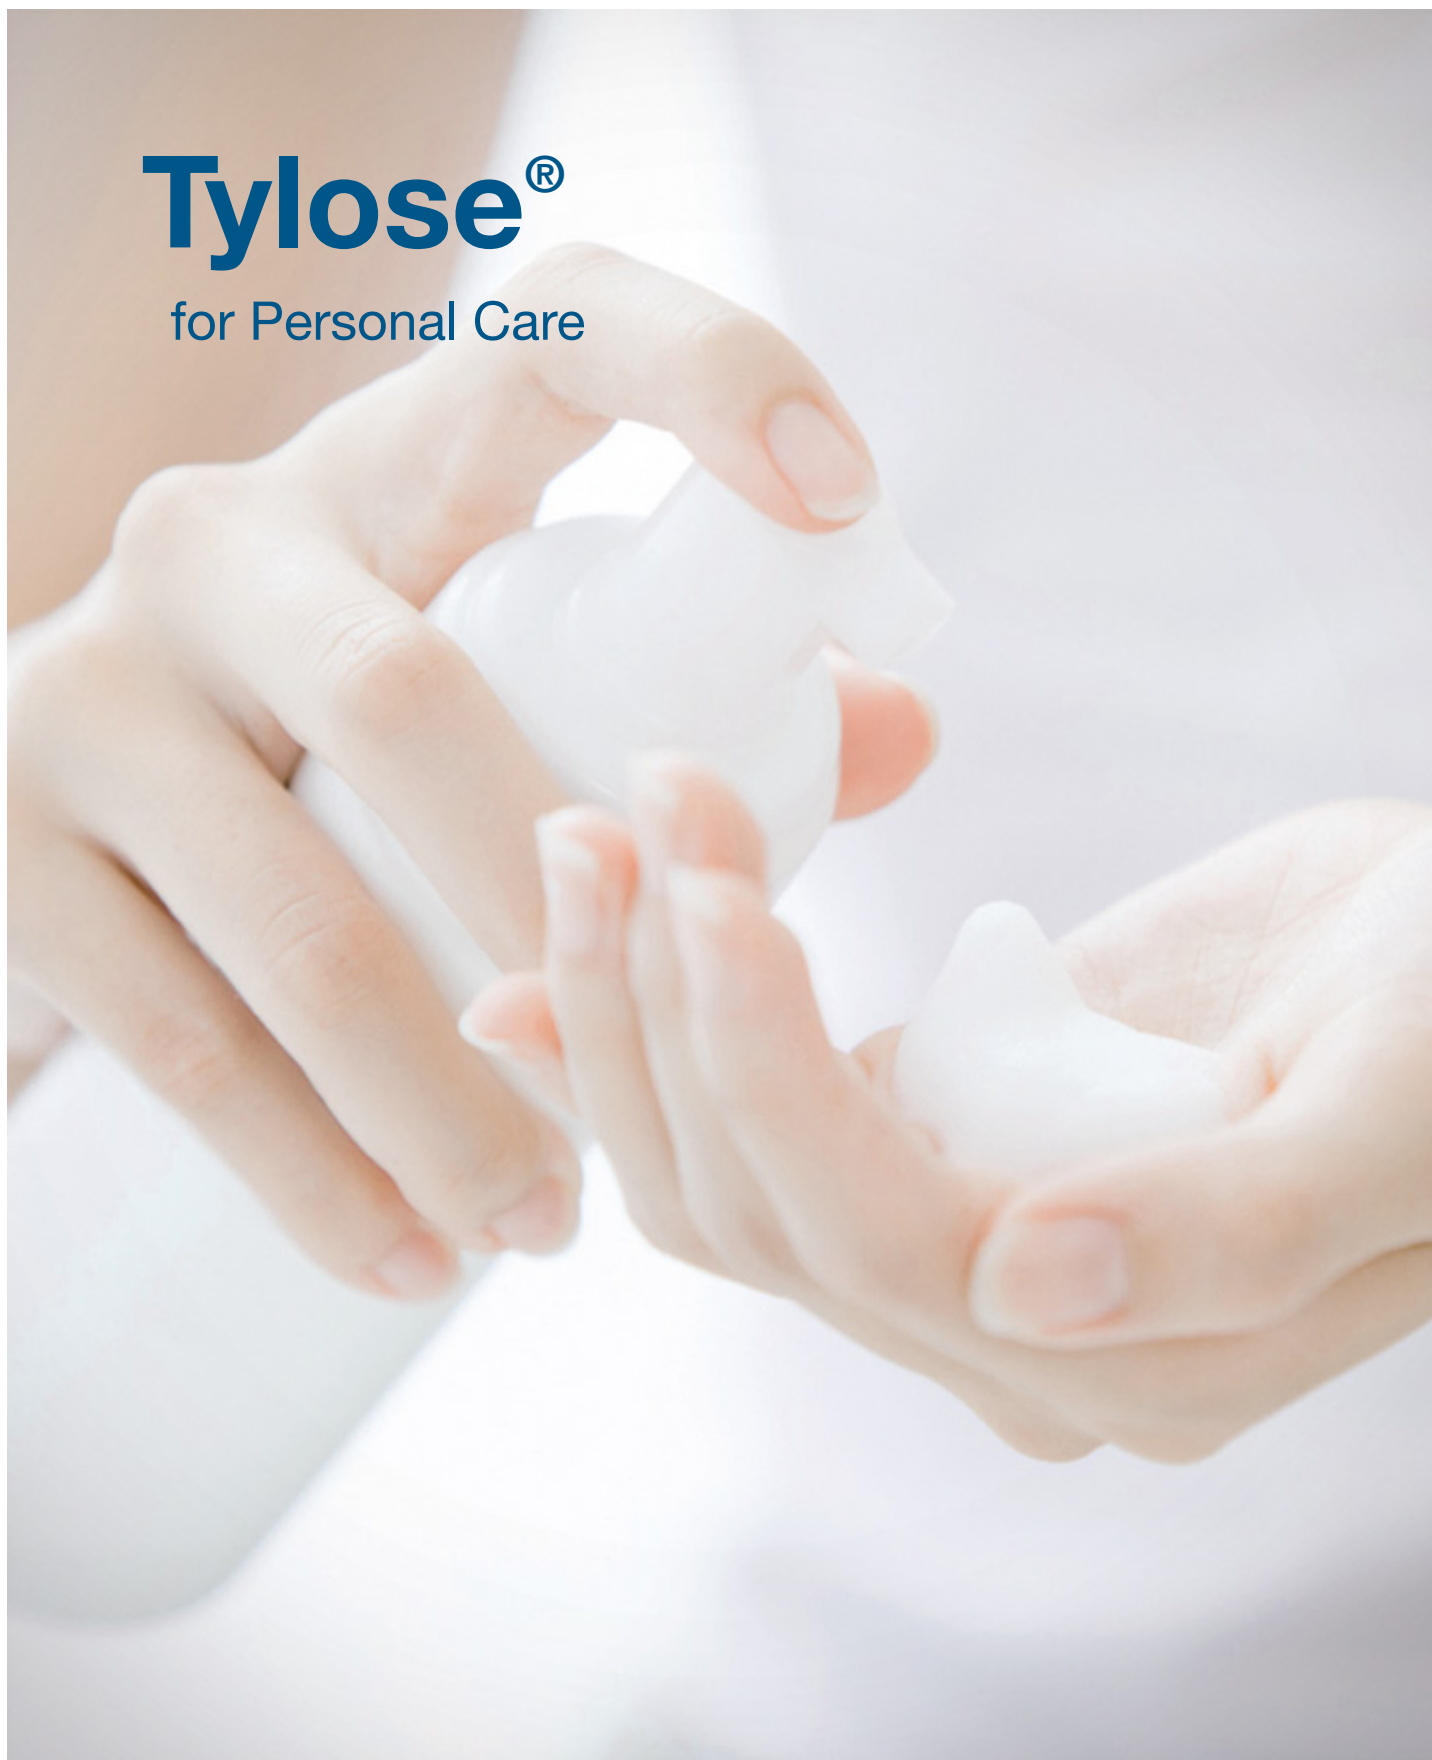

Personal Care products include all areas of nurturing and decorative cosmetics. Nurturing cosmetics include hair care, skin care and oral hygiene. Decorative cosmetics include make-up, powders, eye shadow and mascara. In addition to the thickening effect, Tylose improves the foam stability of shaving foams, preserves moisture during a perm treatment, increases

the stickiness of adhesive creams, acts as a binder in powder make-ups, and eases the distribution of colouring agents in hair.

Being a physiologically harmless cosmetic additive, Tylose offers a multitude of applications in the field of personal care. Tylose hydroxyethyl cellulose (HEC) is our most widely used additive in the cosmetic field. Besides the ultra pure cosmetic types, our standard Tylose types can also be used.

Application Properties

For Personal Care the following properties of Tylose are particularly significant:

- **Thickening/Adjustment of consistency**
- **Stabilisation**
- **High compatibility with other raw materials such as surfactants**

The following INCI designations apply to Tylose grades, which can also be seen in the International Cosmetic Ingredient Dictionary and International Buyers' Guide.

Hydroxyethylcellulose (HEC)	(Tylose H and HS types)
Hydroxypropyl Methylcellulose (HPMC)	(Tylose MO, MOB, MOBS and MOBT types)
Methyl Hydroxyethylcellulose (MHEC)	(Tylose MH, MHB, MHS and MHBS types)


Thickening/Adjustment of Consistency

Tylose® can thicken and adjust the consistency of hair conditioners, hair gels, tooth-pastes and lotions.

The thickening effect of Tylose grades is dependent on the degree of polymerisation (DP) or the molecular weight and the concentration used. When using the same concentration, the viscosity of the solution increases with an increased degree of polymerisation. An increase in Tylose concentration gives a strong increase in viscosity.

Aqueous solutions of Tylose grades are shear thinning liquids. The viscosity is decreased by an increase in shear stress, and returns to its initial viscosity when the shear stress is removed. High viscosity Tylose grades have a stronger shear thinning effect than those of low viscosity, which is shown in the diagram below. The rheological profile varies depending on the Tylose type used, e.g. Tylose H or Tylose MO.

Viscosity curves

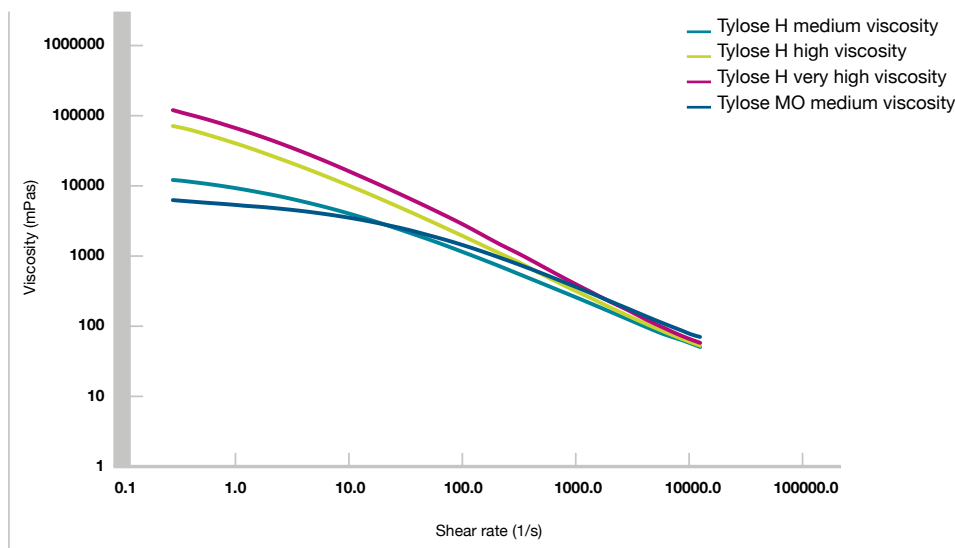

measured at 20 °C, water 20 °dH (German hardness), 1.9 % solution

Stabilisation



Emulsions are commonly used in the field of skin care. A finely distributed mixture of oil and water, two liquids which are normally immiscible, exists in an emulsion without any visible segregation. One liquid exists as little droplets distributed within the other liquid. Either water in oil emulsion (W/O emulsion) or oil in water emulsion (O/W emulsion) is possible depending on

which phase the droplets are formed in.


The preferred stabilisers for O/W emulsions are thickeners that act in the water phase. The surface activity of Tylose is low compared to tenside products. However, due to its thickening effect and colloidal protective properties, Tylose offers an important contribution to the stabilisation of the emulsion formed. The use of low to medium viscosity Tylose H types are preferable in this case.

High Compatibility


Non-ionic Tylose® H, MH, and MO types exhibit a good compatibility with numerous tensides. Furthermore, they are also compatible with many other raw materials such as starch, dextrin, gelatine, sorbitol and propylene glycol. Due to their chemical structure, Tylose grades exhibit good compatibility with electrolytes. Soluble phosphate, carbonate and

sulphate exhibit a stronger flocculating effect in higher concentrations than nitrate and chloride. The electrolyte compatibility of Tylose H grades with chlorides is generally higher than that of Tylose MO grades. In addition AlCl_3 gives a higher thickening effect with Tylose H grades (see diagram below).

Tylose H medium viscosity

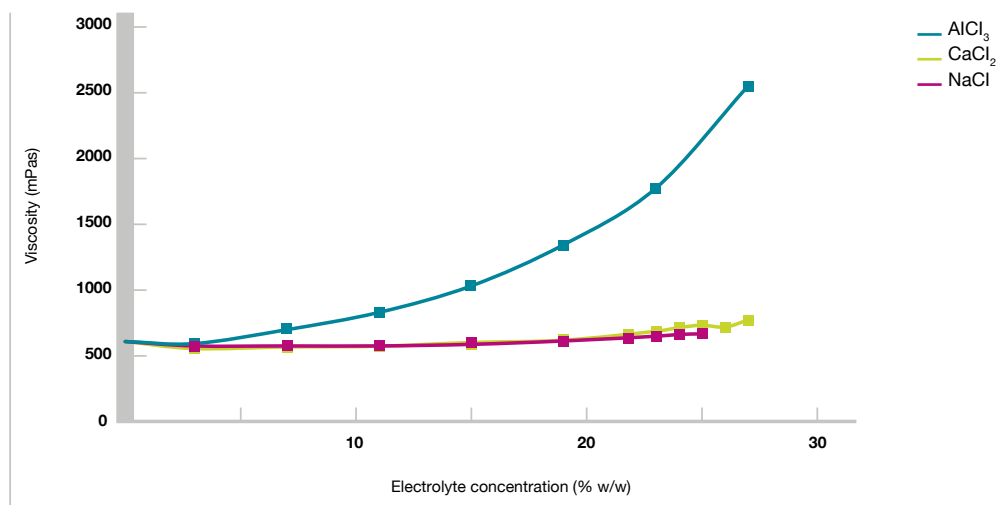

Tylose MO medium viscosity

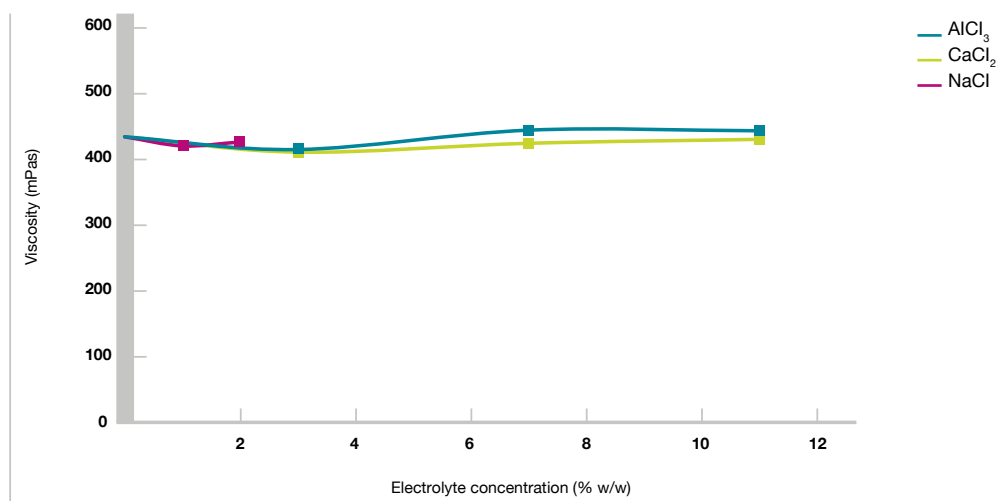


Tylose is initially dissolved in distilled water (1 % absolutely dry) and is subsequently mixed with the electrolyte while stirring.




Although Tylose® is insoluble in most organic solvents, it exhibits relatively good solubility in water/organic solvent mixtures, such as water with ethanol, isopropanol or glycerol, even when relatively high fractions of the organic solvent are present. The following diagrams show the development of viscosity in water with ethanol, isopropanol and glycerol using Tylose H or MO grades.

Tylose H medium viscosity

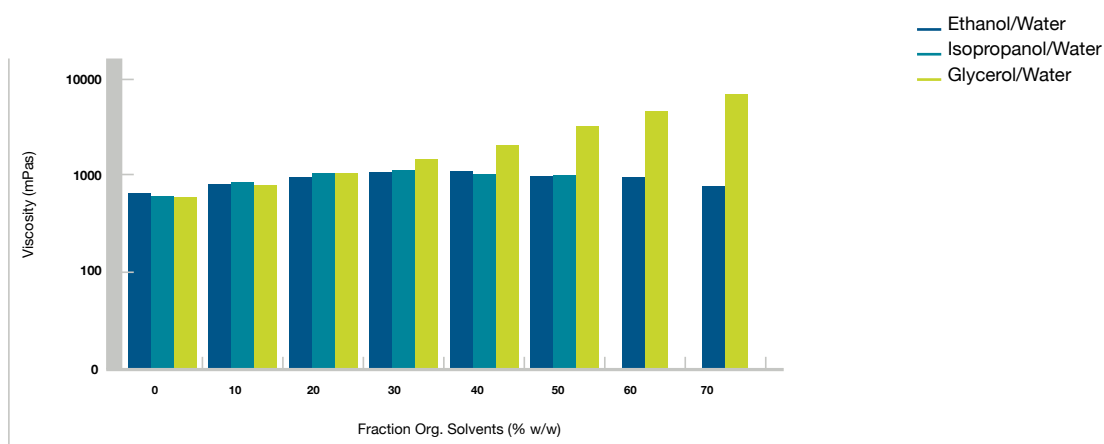

Tylose MO medium viscosity

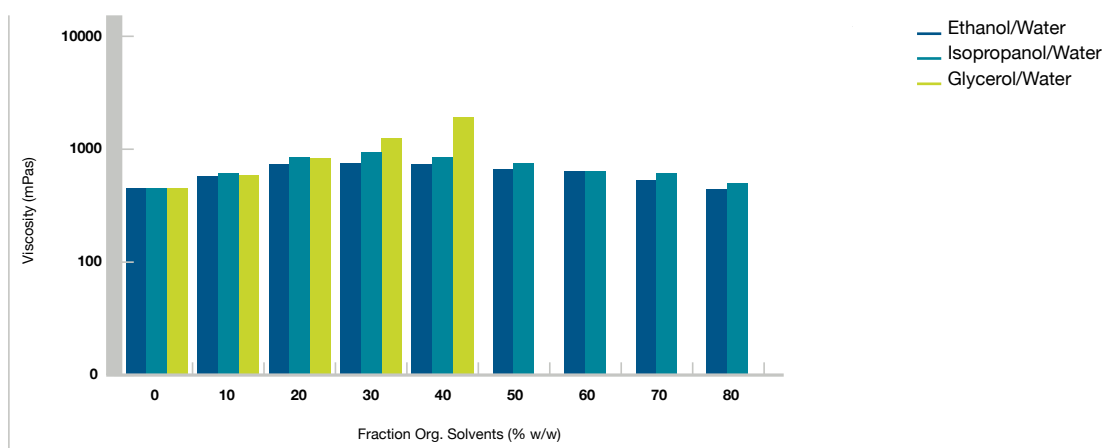

Tylose is initially dissolved in distilled water (1 % absolutely dry) and is subsequently mixed with the organic solvent while stirring.

Recommended Tylose® Products

Tylose Grades	Viscosity	Delayed Solubility	Applications											
	Viscosity ca. (mPas)		Rinses	Hair Conditioner	Shampoo	Hair Gel	Hair Colourants	Toothpaste	Body Lotion	Sun Care Products	Roll-on Deo	Mascara	Foundation (liquid)	Shaving Products

Standard Tylose H/HS

Tylose H 15 YG4	200 (5.0 %) ^{*1}	●							■	■				
Tylose H 20 P2	300 (5.0 %) ^{*1}	●					■		■	■			■	
Tylose H 300 NG4	550 (2.0 %) ^{*1}						■			■	■	■	■	
Tylose H 4000 NG4	4500 (2.0 %) ^{*1}						■	■	■	■	■	■		
Tylose H 10000 NG4	7000 (2.0 %) ^{*1}				■			■	■	■				
Tylose H 10000 P2	7000 (2.0 %) ^{*1}	●			■									
Tylose H 15000 YP2	1200 (1.0 %) ^{*1}	●			■									
Tylose H 30000 YP2	2000 (1.0 %) ^{*1}	●		■	■									
Tylose HS 30000 YP2	2000 (1.0 %) ^{*1}	●			■									
Tylose H 60000 YP2	3000 (1.0 %) ^{*1}	●			■									
Tylose H 100000 YP2	4500 (1.0 %) ^{*1}	●	■	■		■								■
Tylose HS 100000 YP2	4500 (1.0 %) ^{*1}	●	■	■		■								■

Cosmetic Tylose H

Tylose H 4070 NG4	4500 (2.0 %) ^{*1}						■	■	■	■	■	■		
Tylose H 100070 NP2	4500 (1.0 %) ^{*1}		■	■		■								■

Special Grades Tylose MO

Tylose E 707002	4500 (2.0 %) ^{*2}													■
Tylose MO 4000 P4	4500 (2.0 %) ^{*2}													■

■ recommended

^{*1} Brookfield LV, 25 °C, deionised water

^{*2} Brookfield RV, 20 °C, water 20 °dH (German hardness)

Nomenclature of Tylose®

Example: Tylose H 4070 NG4


H		4070		NG4	
	Type of ether		Viscosity level		Chemical refinement
M	Methyl	:	The viscosity level is based on Hoeppler: 2 % solution of the commercial product with 5 % moisture content, 20 °C, 20° dH (German hardness)	Y	Delayed solubility*
H	Hydroxyethyl	60000		N	Non-delayed solubility
O	Hydroxypropyl	30000		products (only for Tylose H grades)**	
	Degree of etherification	15000			
		10000			
	Special higher degrees of etherification, depending on the individual type of ether	6000	Particle size		
		4000		Granule types:	
		2000			Granules (< 500 µm)
		200			
		:		Highly purified cosmetic quality	G4
	70				
			P2	Powder (< 180 µm)	
				P4	Fine powder (< 125 µm)

***Delayed solubility**

Tylose products with delayed solubility are denoted with an additional 'Y'. Delayed solubility Tylose grades can easily be suspended in pH neutral water without forming any lumps. Adjusting the pH to alkaline values can eliminate the delayed solubility. Please note that the pH value should be adjusted after the Tylose is completely dispersed. Raising the pH before dispersion results in lumps.

****Tylose MO grades are not explicitly marked by “N”, even if these products are “non-delayed solubility products”.**

Dissolution time of a delayed solubility Tylose grade at various pH values

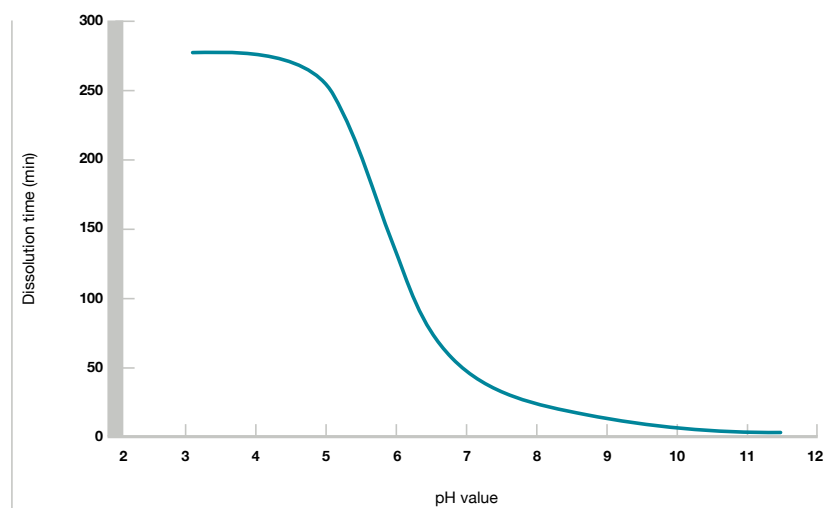



Company Address

SE Tylose GmbH & Co. KG
Industriepark Kalle-Albert
Rheingaustrasse 190 - 196
65203 Wiesbaden
Germany

Phone +49 611 962 - 04
Internet www.SETylose.com



Product Safety

E-Mail Product.Safety@SETylose.com

Customer Service

Reiner Posprich
Phone +49 611 962 - 6325
Fax +49 611 962 - 9082
E-Mail Reiner.Posprich@SETylose.com

Technical Sales Support

Phone +49 611 962 - 8571
Fax +49 611 962 - 9267
E-Mail info@SETylose.com

About us

SE Tylose GmbH & Co. KG is one of the major manufacturers of cellulose ethers world-wide, supplied under the brand name Tylose®. Tylose is used in a wide variety of products and applications.

Applications	
	Building Materials
	Paints
	Oilfield
	Personal Care
	Home Care
	Polymerisation
	Ceramics
	Others

This information is based on our present state of knowledge and is intended to provide general notes about our products and their use only. It should not therefore be construed as guaranteeing the consistence or permanency of the products or specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our General Conditions of Sale.

® = Registered Trademark

07/2019